

built on trust™



61-METER AHTS VESSEL
VARD 2 200

VARD™
a Fincantieri company



Key Facts

Crew | 13
Company Staff | 6
Dimensions |



Performance

Speed | 15.0 kt
Bollard Pull | > 75 t
DP Capability | DP-2



Propulsion Machinery

Main Engine | 2 x 2,600 kW
Aux Generators | 3 x 350 kW
PTO | 2 x 600 kW




Auxiliary Machinery

Tunnel Thruster | 3 x 8 t
Fire Monitors | 2 x 1,200 m³/hr
Emergency Generator | 1 x 160 kW



Tankage


Dry Bulk | 162 m³
Liquid Mud | 240 m³
Fuel Oil | 860 m³
Drill Water | 374 m³
Fresh Water | 182 m³

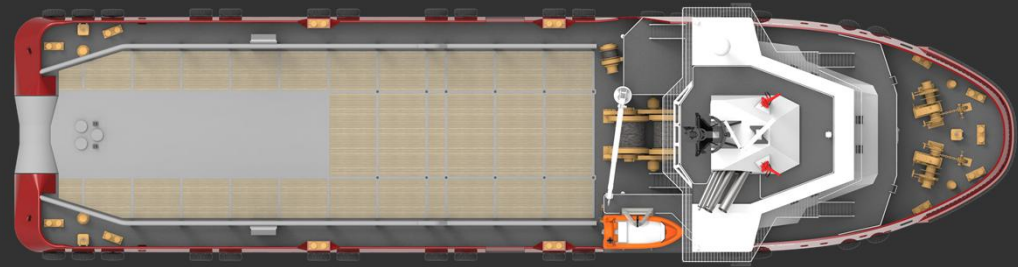

EFFICIENT CAPABLE FLEXIBLE.



Excellent Seakeeping
Stabilizer tank & bilge keels provide roll-damping when stationary and at speed for increased weather availability

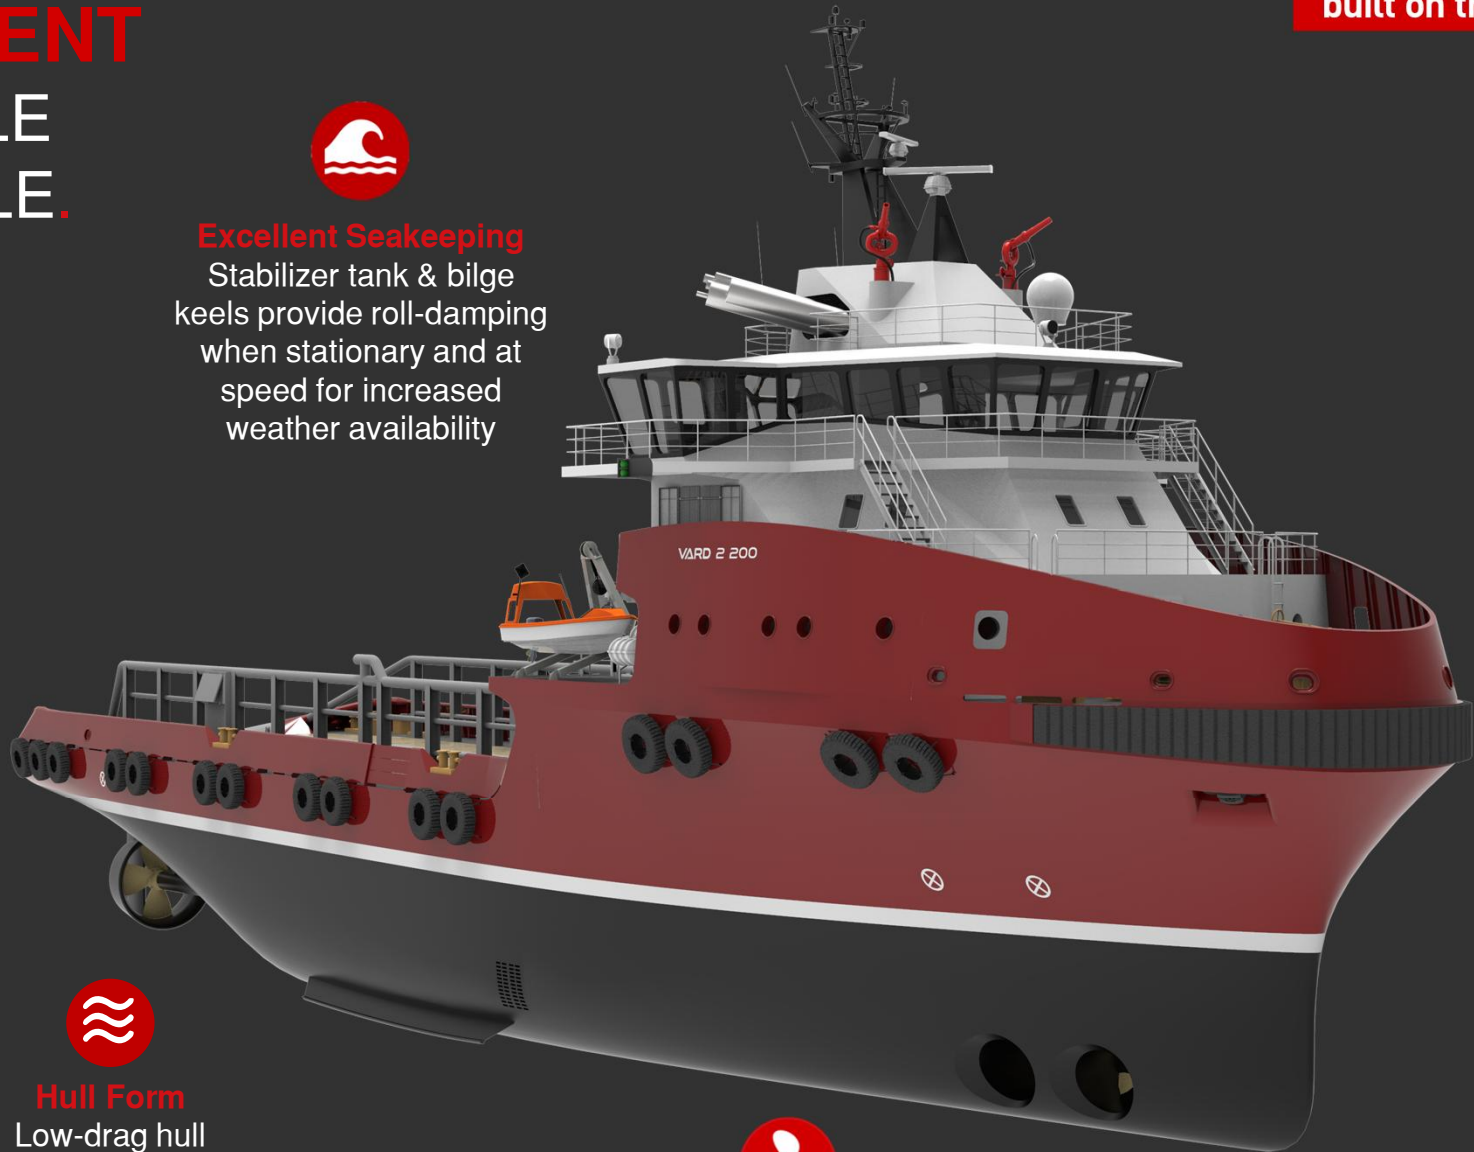


Hull Form
Low-drag hull form provides sufficient stability while reducing fuel consumption



DP-2 Station-keeping
Thrusters sized to maintain station during fire fighting operations

EFFICIENT CAPABLE FLEXIBLE.

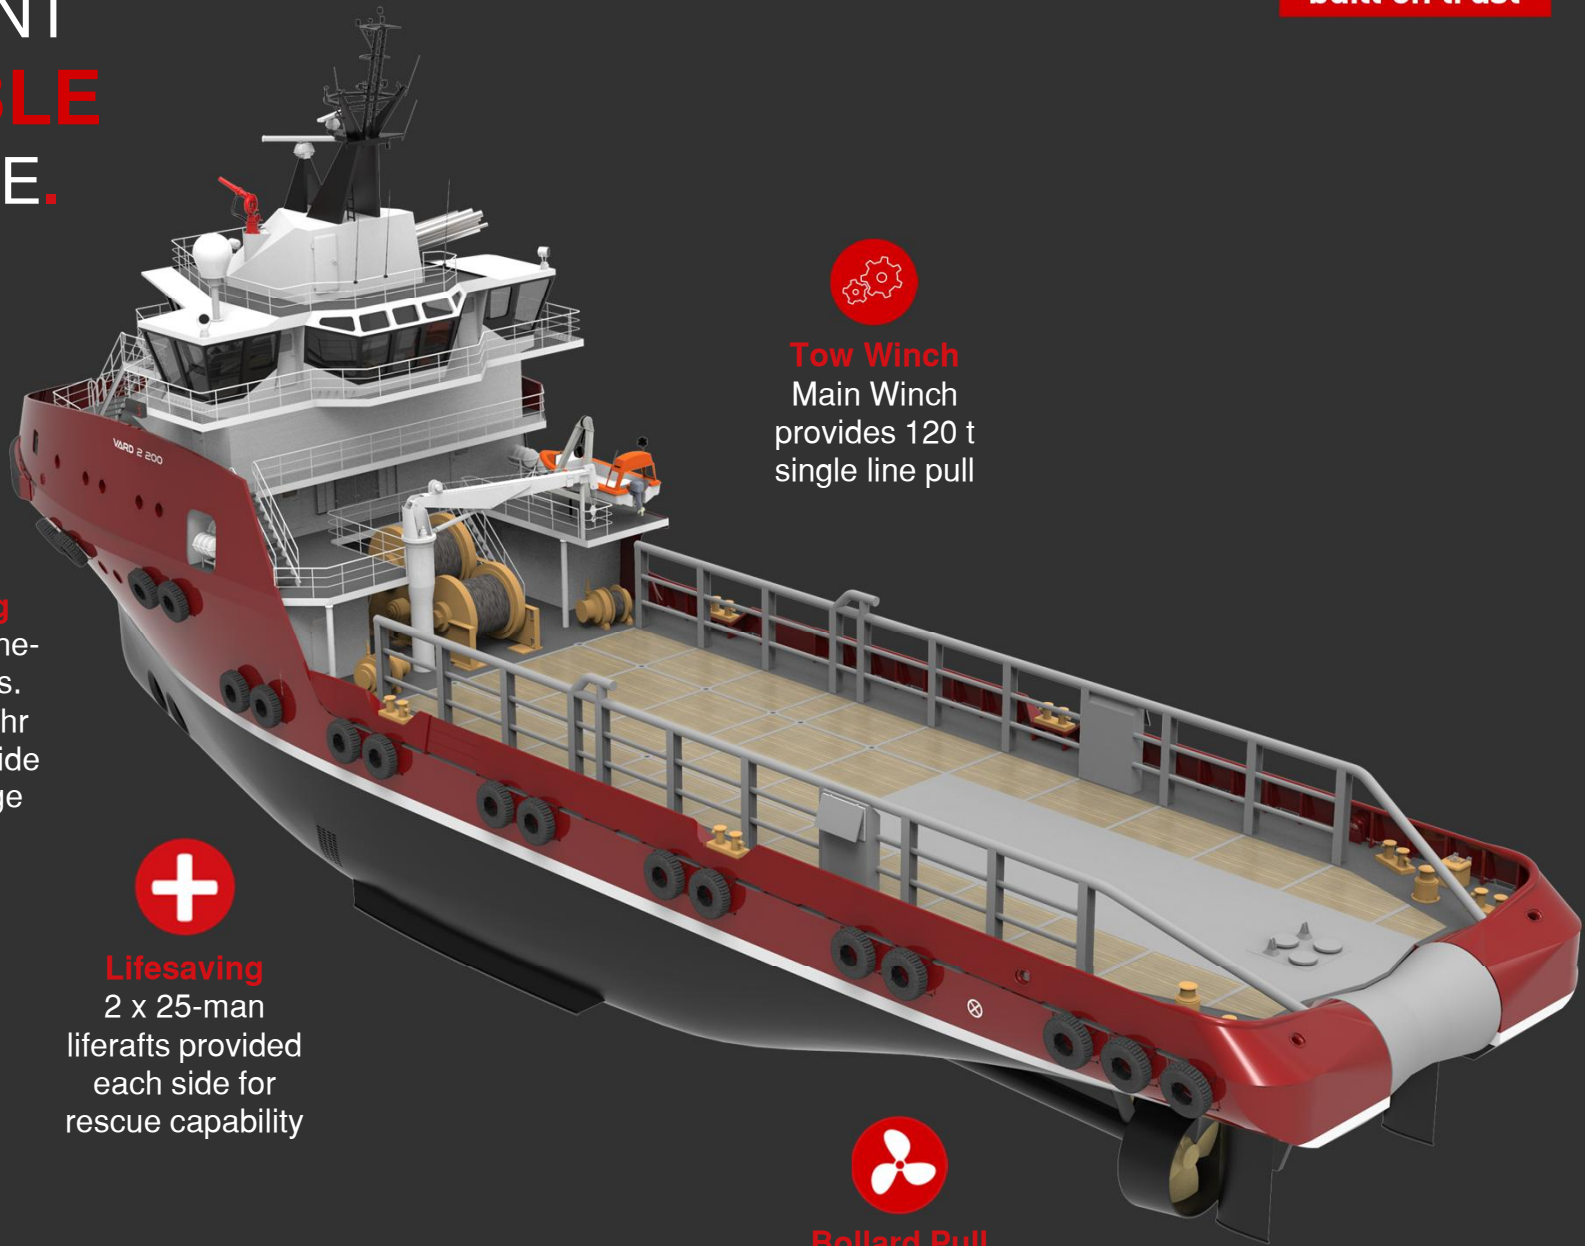

Firefighting
2 x main engine-driven pumps.
2 x 1,200 m³/hr monitors provide 360° coverage



Lifesaving
2 x 25-man liferafts provided each side for rescue capability



Tow Winch
Main Winch provides 120 t single line pull



Bollard Pull
Proven propulsion train delivers > 75 t

built on trust™


EFFICIENT
CAPABLE
FLEXIBLE.



Bridge Visibility
Internal casing for
excellent visibility from
operating stations



Crane
7 t capacity with
15m reach for
material handling

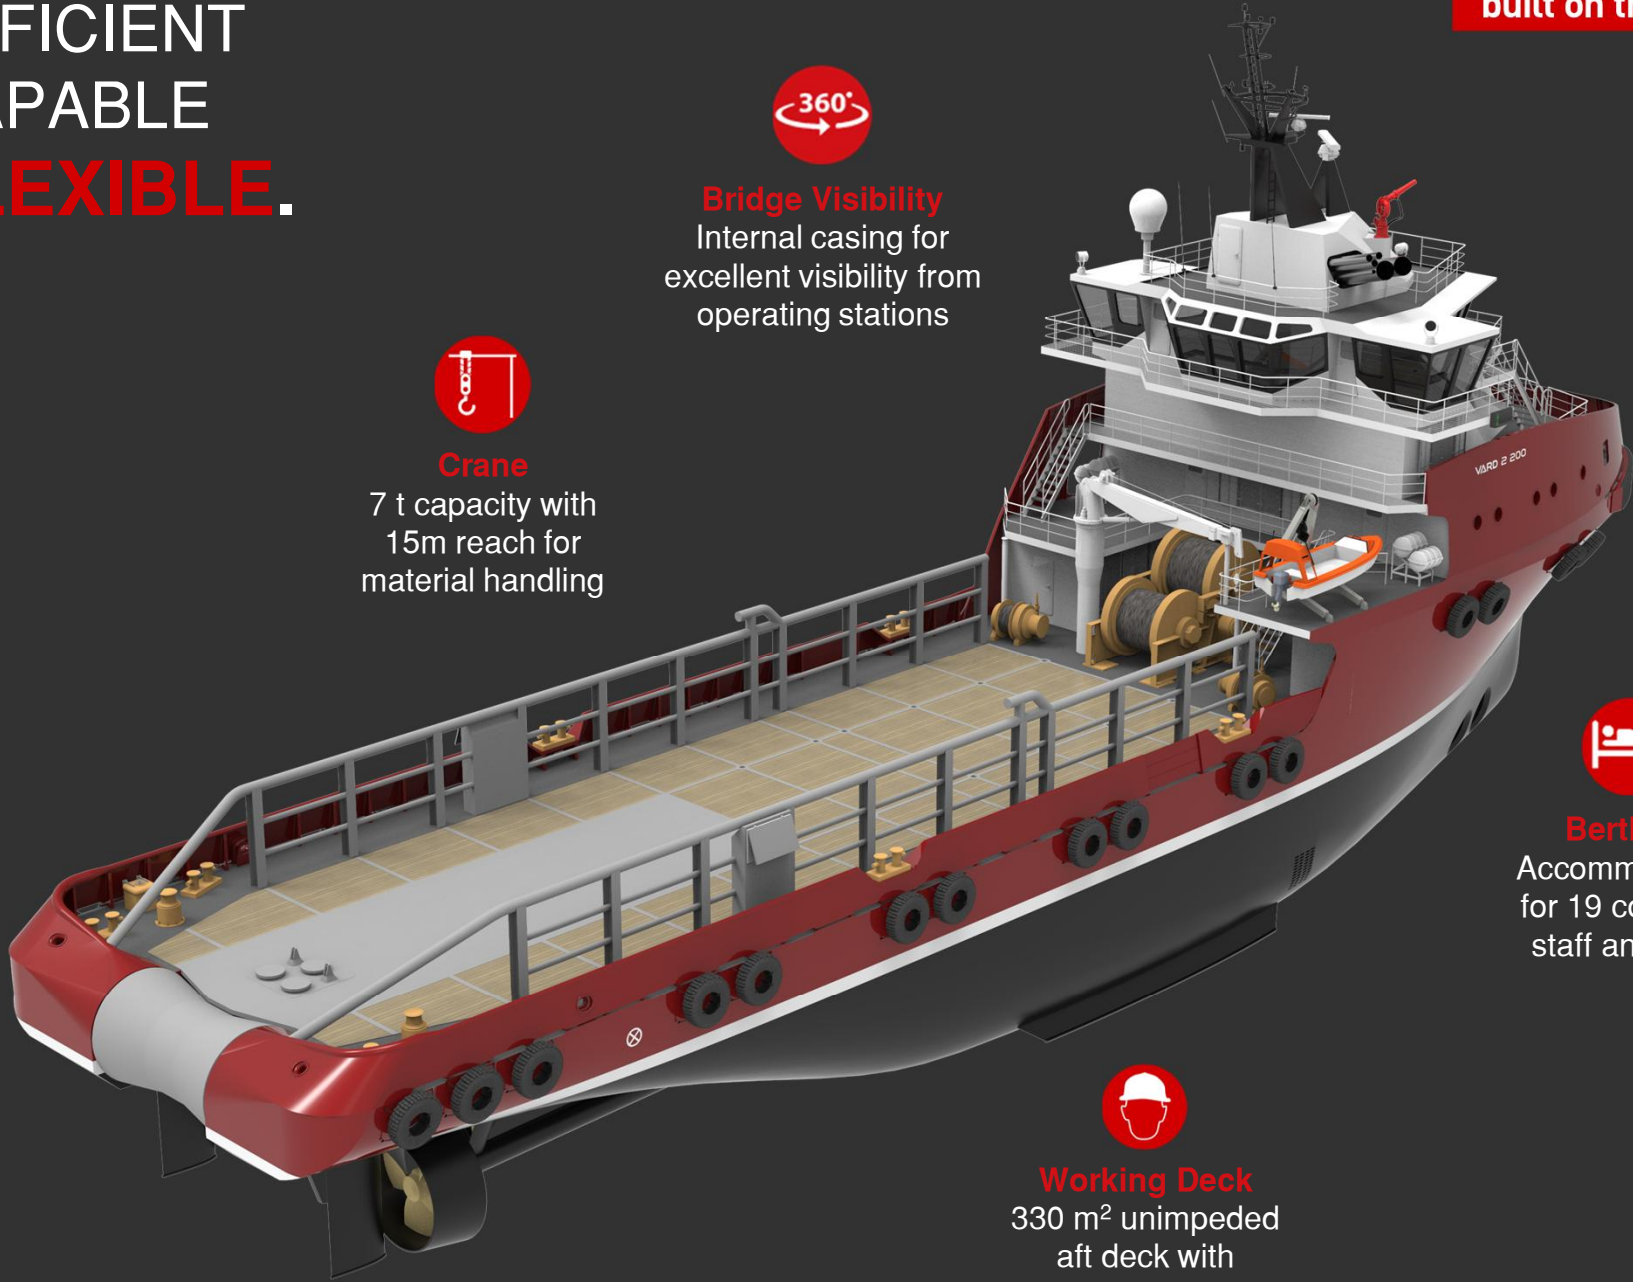

Berthing
Accommodation
for 19 company
staff and crew



Working Deck
330 m² unimpeded
aft deck with
sheathing and
securing fittings

VARD™
a Fincantieri company